


LANTANA LUMINAIRE



LUTRON LED ECOSYSTEMS

HI-LUME 1% ECOSYSTEM LED DRIVERS | 5-SERIES LED DRIVERS

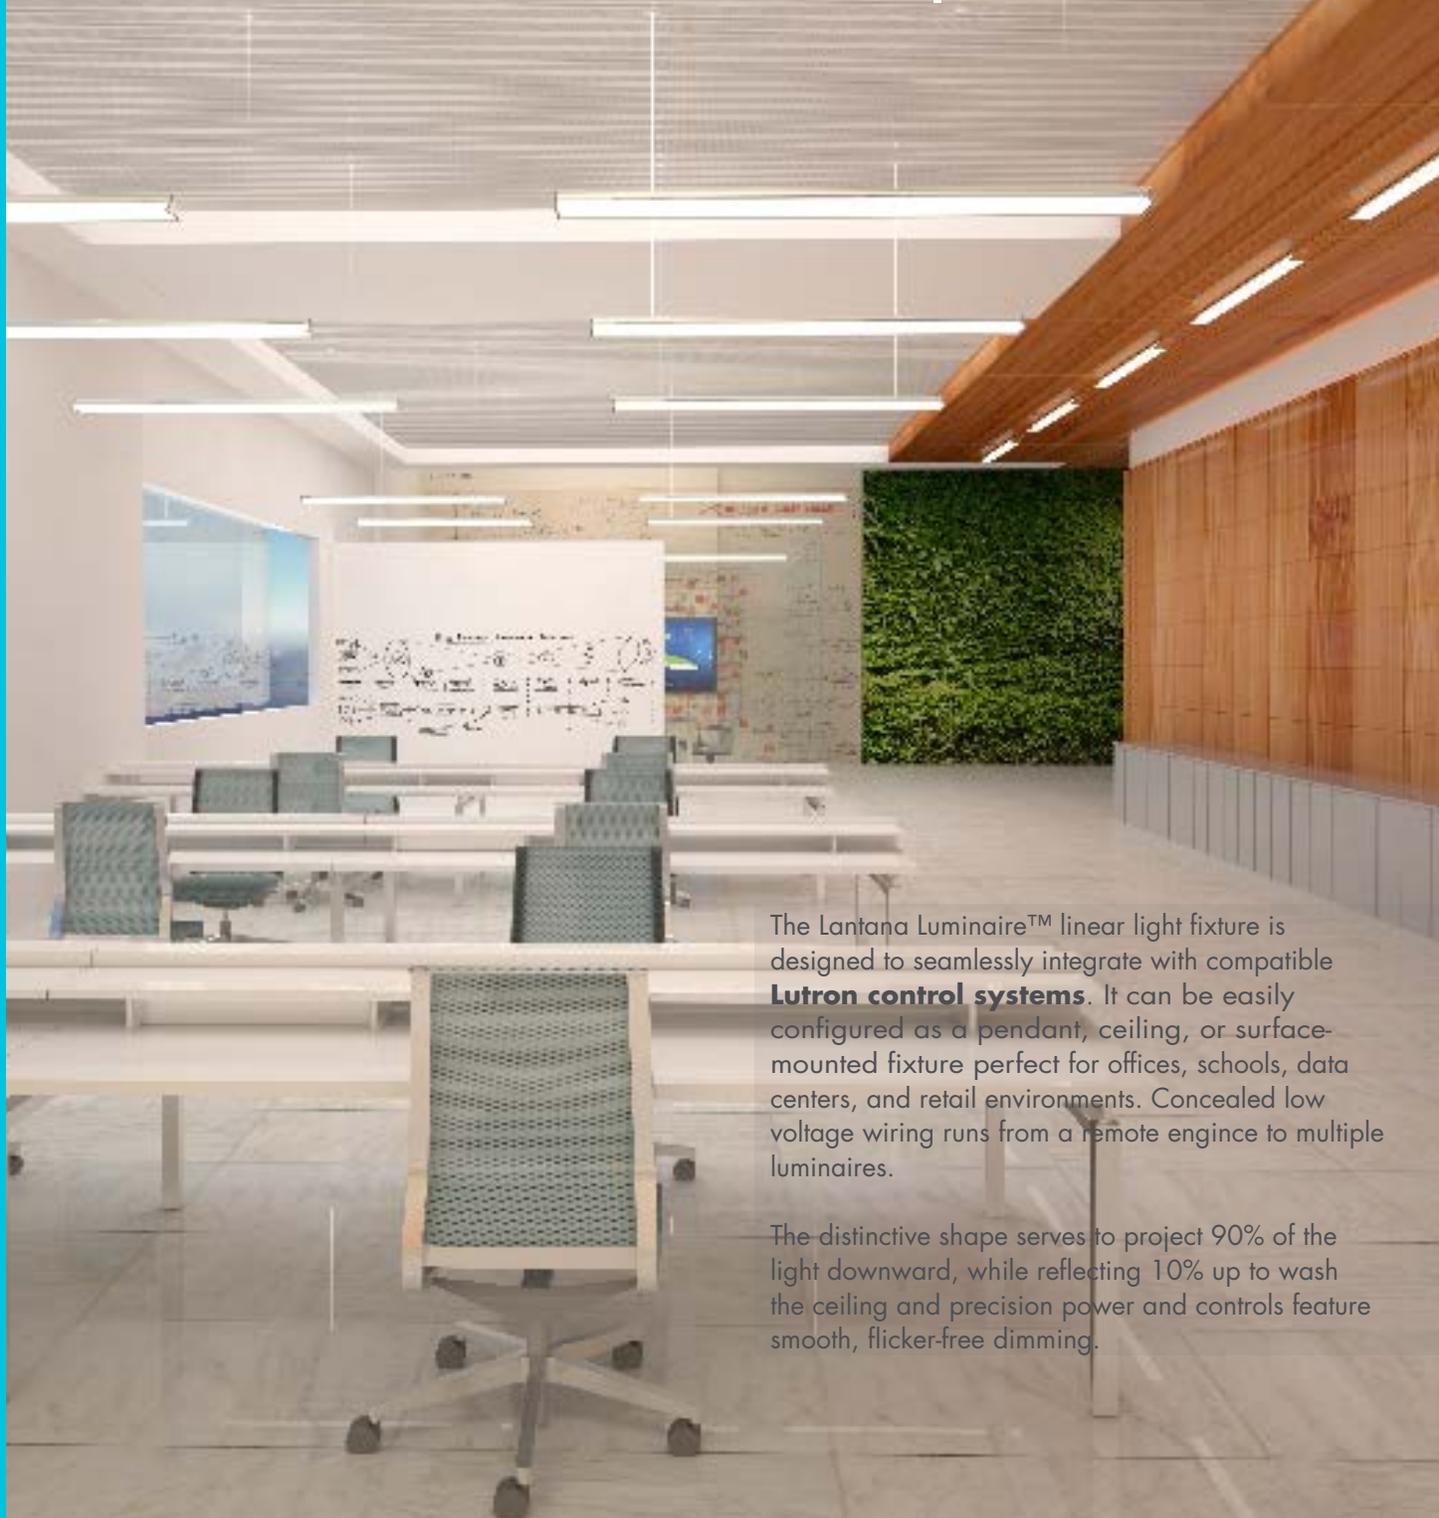

The Lantana Luminaire™ linear light fixture is designed to seamlessly integrate with compatible **Lutron control systems**. It can be easily configured as a pendant, ceiling, or surface-mounted fixture perfect for offices, schools, data centers, and retail environments. Concealed low voltage wiring runs from a remote engine to multiple luminaires.

The distinctive shape serves to project 90% of the light downward, while reflecting 10% up to wash the ceiling and precision power and controls feature smooth, flicker-free dimming.

Efficient and Distinctive Illumination

One of the most energy efficient LED luminaires on the market, Lantana has a DC efficacy of 142 lm/watt with optimal operating conditions of 48V @ 1.05A

The unique form and optical design of Lantana provides 90% downlight and 10% uplight, utilizing the majority of input energy to illuminate the room while still providing an even ceiling wash.

Simple and Elegant Installation

Low voltage wiring can be easily run without conduit or j-boxes from the lights to drivers mounted remotely. The fixture has optional hardware kits for pendant or unistrut mounting. Lantana fixtures feature simple control system integration for systems operating comparable Class 2 drivers and voltages.



Product Details

Model: Lantana 6-U-41-C2

Product Series
Lantana Lantana


Fixture Length
6 foot 6

Mounting Type
Universal Surface Mount U


Color Temperature
4100k 41

Configuration
Class 2 Remote Driver C2


Dimensions:

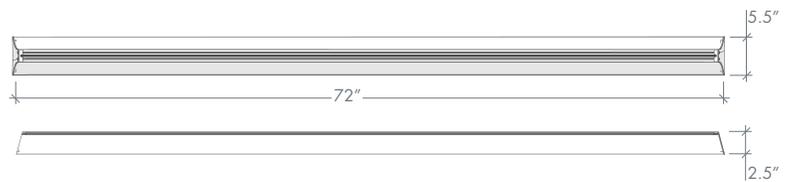

Mounting Options:



Unistrut Mount



Ceiling Pendant Mount

